

CRAFTED TO SHINE



Experience the LED range from soft glow to bold shine

LIGHTING

WHERE INNOVATION MEETS ILLUMINATION



Uniblaze stands at the forefront of lighting technology, bringing brilliance to everyday life through cutting-edge, energy-efficient solutions. As a brand known for its unwavering commitment to quality and forward-thinking design, we offer a wide spectrum of high-performance LED products — from bulbs and panels to downlights and street lights — each engineered with precision and purpose.

Driven by value engineering and sustainability, our lighting solutions are built to deliver more than just light — they create experiences. We understand that modern consumers seek not only efficiency, but elegance, durability, and eco-responsibility. That's why every Uniblaze product is thoughtfully designed to shine brighter, last longer, and consume less.

Step into a world where form meets function, and technology lights the way to a greener future.





RECESSED DOWNLIGHT

EDGELITE HAP PANEL



Housing AL+PC	CRI >80
Input Voltage AC 140-270V, 50Hz	Light Source SMD LED (2835)
Body Colour White	Driver Integrated (Non Isolated)
Surge Protection Upto 3/4 kV	Diffuser PS Milky Antiglare

Applications

Home | School | Hotels | Malls | Hospitals

Product Code	Wattage No	Colour Temp (CRI)	Lumen (Lm)	Dimension (AxB) mm	Cut-Out (C) mm
Edgelit HAP Panel SQ/RD					
108351	3W	3000K/4000K/6500K	195	85x85/ø85	ø75
108352	6W	3000K/4000K/6500K	390	120x120/ø120	ø105
108353	12W	3000K/4000K/6500K	840	170x170/ø170	ø155
108354	15W	3000K/4000K/6500K	1125	190x190/ø190	ø175
108355	18W	3000K/4000K/6500K	1350	220x220/ø220	ø203
EDGELITE PANEL SQ/RD (FAZER ZOLO)					
108356	3W	3000K/4000K/6500K	195	86x86/ø86	70x70/ø70
108357	6W	3000K/4000K/6500K	420	120x120/ø120	99x99/ø99
108358	15W	3000K/4000K/6500K	1125	170x170/ø170	149x149/ø149
108359	20W	3000K/4000K/6500K	1350	220x220/ø220	199x199/ø199

EDGELITE PANEL FAZER



Housing AL+PC	CRI >80
Input Voltage AC 140-270V, 50Hz	Light Source SMD LED (2835)
Body Colour White	Driver Integrated (Non Isolated)
Surge Protection Upto 4 kV	Diffuser PS Milky Antiglare



RECESSED DOWNLIGHT

6+6W PANEL LIGHT



Housing PC	CRI >80
Input Voltage AC 100-300V, 50Hz	Light Source SMD LED (2835)
Body Colour White	Driver Integrated (Non Isolated)
Surge Protection Upto 2.5 kV	Diffuser PC

Applications

Home | School | Hotels | Malls | Hospitals

Product Code	Wattage No	Colour Temp (CRI)	Lumen (Lm)	Dimension (AxB) mm	Cut-Out (C) mm
PANEL LIGHT					
108360	6W+6W	3000K/4000K/6500K	420	ø140	ø126
EDGE LIT PANEL DOWNLIGHT (FF)					
108361	3W	3000K/4000K/6500K	200	82x82/ø82	70
108362	6W	3000K/4000K/6500K	400	120x120/ø120	104
108363	12W	3000K/4000K/6500K	1000	172x172/ø172	153
108364	15W	3000K/4000K/6500K	1300	172x172/ø172	153
108365	18W	3000K/4000K/6500K	1500	190x190/ø190	173
108366	22W	3000K/4000K/6500K	2000	228x228/ø228	203

FLICKER FREE ALUMINIUM PANEL



Housing PC	CRI >80
Input Voltage AC 140-270V, 50Hz	Light Source SMD LED (2835)
Body Colour White	Driver Non Integrated (Isolated)
Surge Protection Upto 2.5 kV	Diffuser PS Milky Antiglare

 88% Energy Saving	 Non-Dimmable	 External Driver
 120° Beam Angle	 Easy Installation	 Eco Friendly
 Fluctuation Proof	 Robust Design	 IP 20

ADJUSTABLE PANEL DOWNLIGHT



Housing PC	CRI >80
Input Voltage AC 140-270V, 50Hz	Light Source SMD LED (2835)
Body Colour White/Orange/Gray/Green	Driver Integrated (Non Isolated)
Surge Protection Upto 4 kV	Diffuser PC Milky Antiglare



Applications



Home | School | Hotels | Malls | Hospitals

Product Code	Wattage No	Colour Temp (CRI)	Lumen (Lm)	Dimension (AxB) mm	Cut-Out (C) mm
ADJUSTABLE PANEL DOWNLIGHT SQ/RD					
108367	12W	3000K/4000K/6500K	960	120x120/ø120	75-100
108368	18W	3000K/4000K/6500K	1530	170x170/ø170	75-150
108369	24W	3000K/4000K/6500K	1920	222x222/ø222	62-196

		
88% Energy Saving	Non-Dimmable	External Driver
		
120° Beam Angle	Easy Installation	Eco Friendly
		
Fluctuation Proof	Robust Design	IP 20



BACKLIGHT PANEL DOWNLIGHT

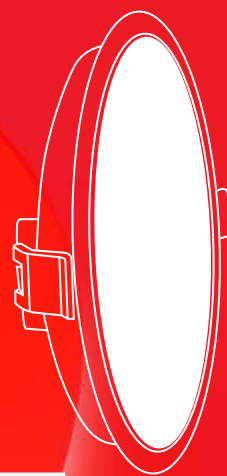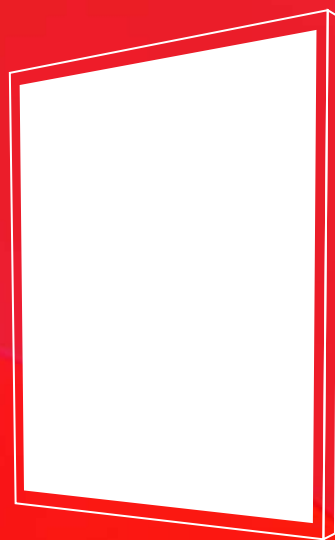



BACKLITE PANEL DOWNLIGHT

2X2 LED RECESSED BACKLIT PANEL



Housing AL	CRI >80
Input Voltage AC 140-270V, 50Hz	Light Source SMD LED (2835)
Body Colour White	Driver Non-Integrated (Isolated)
Surge Protection Upto 2.5 kV	Diffuser PS Milky Antiglare

Applications

Home | School | Hotels | Malls | Hospitals

Product Code	Wattage No	Colour Temp (CRI)	Lumen (Lm)	Dimension (AxB) mm	Cut-Out (C) mm
2X2 PANEL					
108370	36W	3000K/4000K/6500K	3450	595x595	NA
PLASTIC DOWNLIGHT PANEL SQ/RD					
108371	6W	3000K/4000K/6500K	600	120x120/ø120	105x105/ø105
108372	10W	3000K/4000K/6500K	840	120x120/ø120	105x105/ø105
108373	12W	3000K/4000K/6500K	840	170x170/ø170	155x155/ø155
108374	15W	3000K/4000K/6500K	1125	170x170/ø170	155x155/ø155
108375	18W	3000K/4000K/6500K	1350	220x220/ø220	204x204/ø204
108376	22W	3000K/4000K/6500K	840	220x220/ø220	204x204/ø204

LED PLASTIC DOWNLIGHT



Housing PC	CRI >80
Input Voltage AC 140-270V, 50Hz	Light Source SMD LED (2835)
Body Colour White	Driver Integrated (Non Isolated)
Surge Protection Upto 4 kV	Diffuser PS Milky Antiglare

 88% Energy Saving	 Non-Dimmable	 External Driver
 120° Beam Angle	 Easy Installation	 Eco Friendly
 Fluctuation Proof	 Robust Design	 IP 20

SPDL PANEL DOWNLIGHT



Housing PC	CRI >80
Input Voltage AC 140-270V, 50Hz	Light Source SMD LED (2835)
Body Colour White	Driver Integrated (Non Isolated)
Surge Protection Upto 4 kV	Diffuser PS Milky Antiglare

Applications

Home | School | Hotels | Malls | Hospitals

Product Code	Wattage No	Colour Temp (CRI)	Lumen (Lm)	Dimension (AxB) mm	Cut-Out (C) mm
SPDL PANEL DOWNLIGHT SQ/RD					
108377	10W	3000K/4000K/6500K	900	115x115/ø115	100/4"
108378	15W	3000K/4000K/6500K	1500	140x140/ø140	125/5"
108379	18W	3000K/4000K/6500K	1800	170x170/ø170	150/6"
108380	24W	3000K/4000K/6500K	2400	215x215/ø215	195/8"
2x2 HOLLOW LIGHT					
108381	36W	3000K/4000K/6500K	3600	ø570x570	NA

2x2 HOLLOW LIGHT



Housing PC	CRI >80
Input Voltage AC 100-300V, 50Hz	Light Source SMD LED (2835)
Body Colour White	Driver Non-Integrated (Non Isolated)
Surge Protection Upto 4 kV	Diffuser PC

 88% Energy Saving	 Non-Dimmable	 External Driver
 120° Beam Angle	 Easy Installation	 Eco Friendly
 Fluctuation Proof	 Robust Design	 IP 20

BACKLITE PANEL DOWNLIGHT

DEEP RECESSED DOWNLIGHT

PROFILE PANEL



Housing AL	CRI >80
Input Voltage AC 100-300V, 50Hz	Light Source SMD LED (2835)
Body Colour White/Black	Driver Non-Integrated (Isolated)
Surge Protection Upto 4 kV	Diffuser PC

Housing PC	CRI >80
Input Voltage AC 100-300V, 50Hz	Light Source SMD LED (2835)
Body Colour White	Driver Non Integrated (Non Isolated)
Surge Protection Upto 4 kV	Diffuser PC

Applications

Home | School | Hotels | Malls | Hospitals

Product Code	Wattage No	Colour Temp (CRI)	Lumen (Lm)	Dimension (AxB) mm	Cut-Out (C) mm
DEEP RECESSED DOWNLIGHT SQ/RD					
108382	10W	3000K/4000K/6500K	1000	109.5x109.5/ø119	100x100/ø110
108383	12W	3000K/4000K/6500K	1200	109.5x109.5/ø119	100x100/ø110
108384	15W	3000K/4000K/6500K	1500	100x100/ø110	100x100/ø110
108385	18W	3000K/4000K/6500K	1800	134x134/ø142	134x134/ø142
108386	24W	3000K/4000K/6500K	2400	158x158/ø164	158x158/ø164
PROFILE PANEL SQ/RD					
108387	18W	3000K/4000K/6500K	1260	170x170/ø170	157x157/ø157

88% Energy Saving
 Non-Dimmable
 External Driver

120° Beam Angle
 Easy Installation
 Eco Friendly

Fluctuation Proof
 Robust Design
 IP 20





SURFACE DOWNLIGHT

LED STRIKER




Housing PC	CRI >80
Input Voltage AC 140-270V, 50Hz	Light Source SMD LED (2835)
Body Colour White	Driver DOB Types
Surge Protection Upto 2.5 kV	Diffuser PC Milky Antiglare

Applications

Home | School | Hotels | Malls | Hospitals

Product Code	Wattage No	Colour Temp (CRI)	Lumen (Lm)	Dimension (AxB) mm	Cut-Out (C) mm
STRIKER PANEL DOWNLIGHT					
108388	5W	3000K/4000K/6500K	500	ø61	NA
RIMLESS SURFACE DOB INDOOR					
108389	6W	3000K/4000K/6500K	480	100x100/ø100	NA
108390	12W	3000K/4000K/6500K	960	125x125/ø125	NA
108391	18W	3000K/4000K/6500K	1440	100x100/ø110	NA
108392	24W	3000K/4000K/6500K	1920	200x200/ø200	NA

RIMLESS SURFACE DOB INDOOR

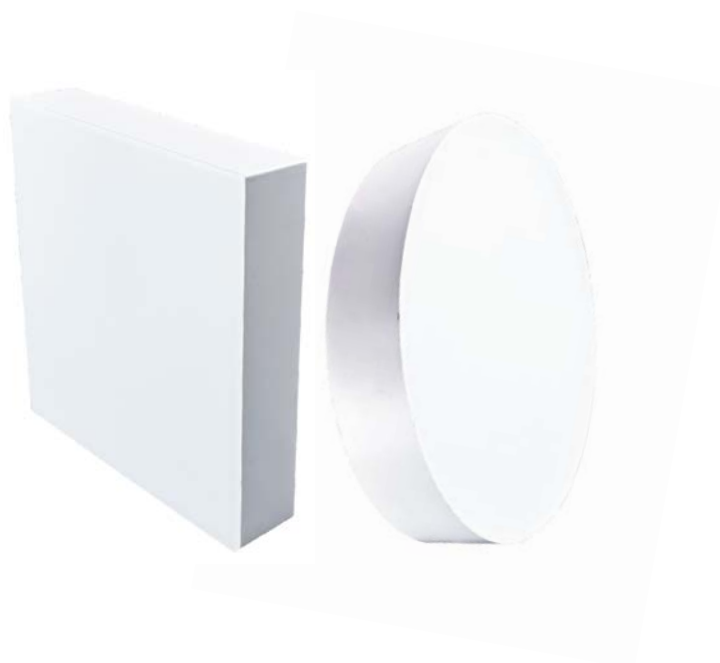


Housing PC	CRI >80
Input Voltage AC 140-270V, 50Hz	Light Source SMD LED (2835)
Body Colour White	Driver DOB Based
Surge Protection Upto 2.5 kV	Diffuser PC Milky Antiglare

 88% Energy Saving	 Non-Dimmable	 External Driver
 120° Beam Angle	 Easy Installation	 Eco Friendly
 Fluctuation Proof	 Robust Design	 IP 20

SURFACE DOWNLIGHT

RIMLESS DOWNLIGHT

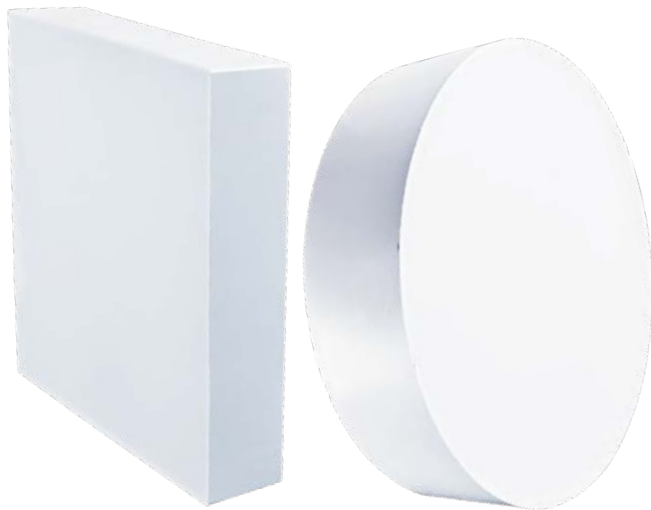

Housing PC	CRI >80
Input Voltage AC 140-270V, 50Hz	Light Source SMD LED (2835)
Body Colour White	Driver Integrated (Non Isolated)
Surge Protection Upto 4 kV	Diffuser PC

Applications

Home | School | Hotels | Malls | Hospitals

SGL PANEL DOWNLIGHT



Housing PC	CRI >80
Input Voltage AC 140-270V, 50Hz	Light Source SMD LED (2835)
Body Colour White	Driver Integrated (Non Isolated)
Surge Protection Upto 3.6/4 kV	Diffuser PC Milky Antiglare

Product Code	Wattage No	Colour Temp (CRI)	Lumen (Lm)	Dimension (AxB) mm	Cut-Out (C) mm
RIMLESS DOWNLIGHT					
108393	3W	3000K/4000K/6500K	270	60x60/ø60	NA
108394	6W	3000K/4000K/6500K	600	100x100/ø100	NA
108395	12W	3000K/4000K/6500K	1500	125x125/ø125	NA
108396	18W	3000K/4000K/6500K	1800	150x150/ø150	NA
108397	24W	3000K/4000K/6500K	2400	200x200/ø200	NA
SGL PANEL DOWNLIGHT RD					
108398	7W	3000K/4000K/6500K	630	ø100	NA
108399	12W	3000K/4000K/6500K	1080	ø145	NA
108400	20W	3000K/4000K/6500K	1800	ø195	NA

 88% Energy Saving	 Non-Dimmable	 External Driver
 120° Beam Angle	 Easy Installation	 Eco Friendly
 Fluctuation Proof	 Robust Design	 IP 20

MODULAR SURFACE



Housing PC	CRI >80
Input Voltage AC 140-270V, 50Hz	Light Source SMD LED (2835)
Body Colour White	Driver Integrated (Non Isolated)
Surge Protection Upto 2kV	Diffuser PC Milky Antiglare


Applications

Home | School | Hotels | Malls | Hospitals

Product Code	Wattage No	Colour Temp (CRI)	Lumen (Lm)	Dimension (AxB) mm	Cut-Out (C) mm
MODULAR SURFACE RD					
108401	7W	3000K/4000K/6500K	700	85x85/ø85	NA
108402	9W	3000K/4000K/6500K	900	110x110/ø110	NA
108403	12W	3000K/4000K/6500K	1200	135x135/ø135	NA
108404	15W	3000K/4000K/6500K	1500	135x135/ø135	NA



 88% Energy Saving	 Non-Dimmable	 External Driver
 120° Beam Angle	 Easy Installation	 Eco Friendly
 Fluctuation Proof	 Robust Design	 IP 20

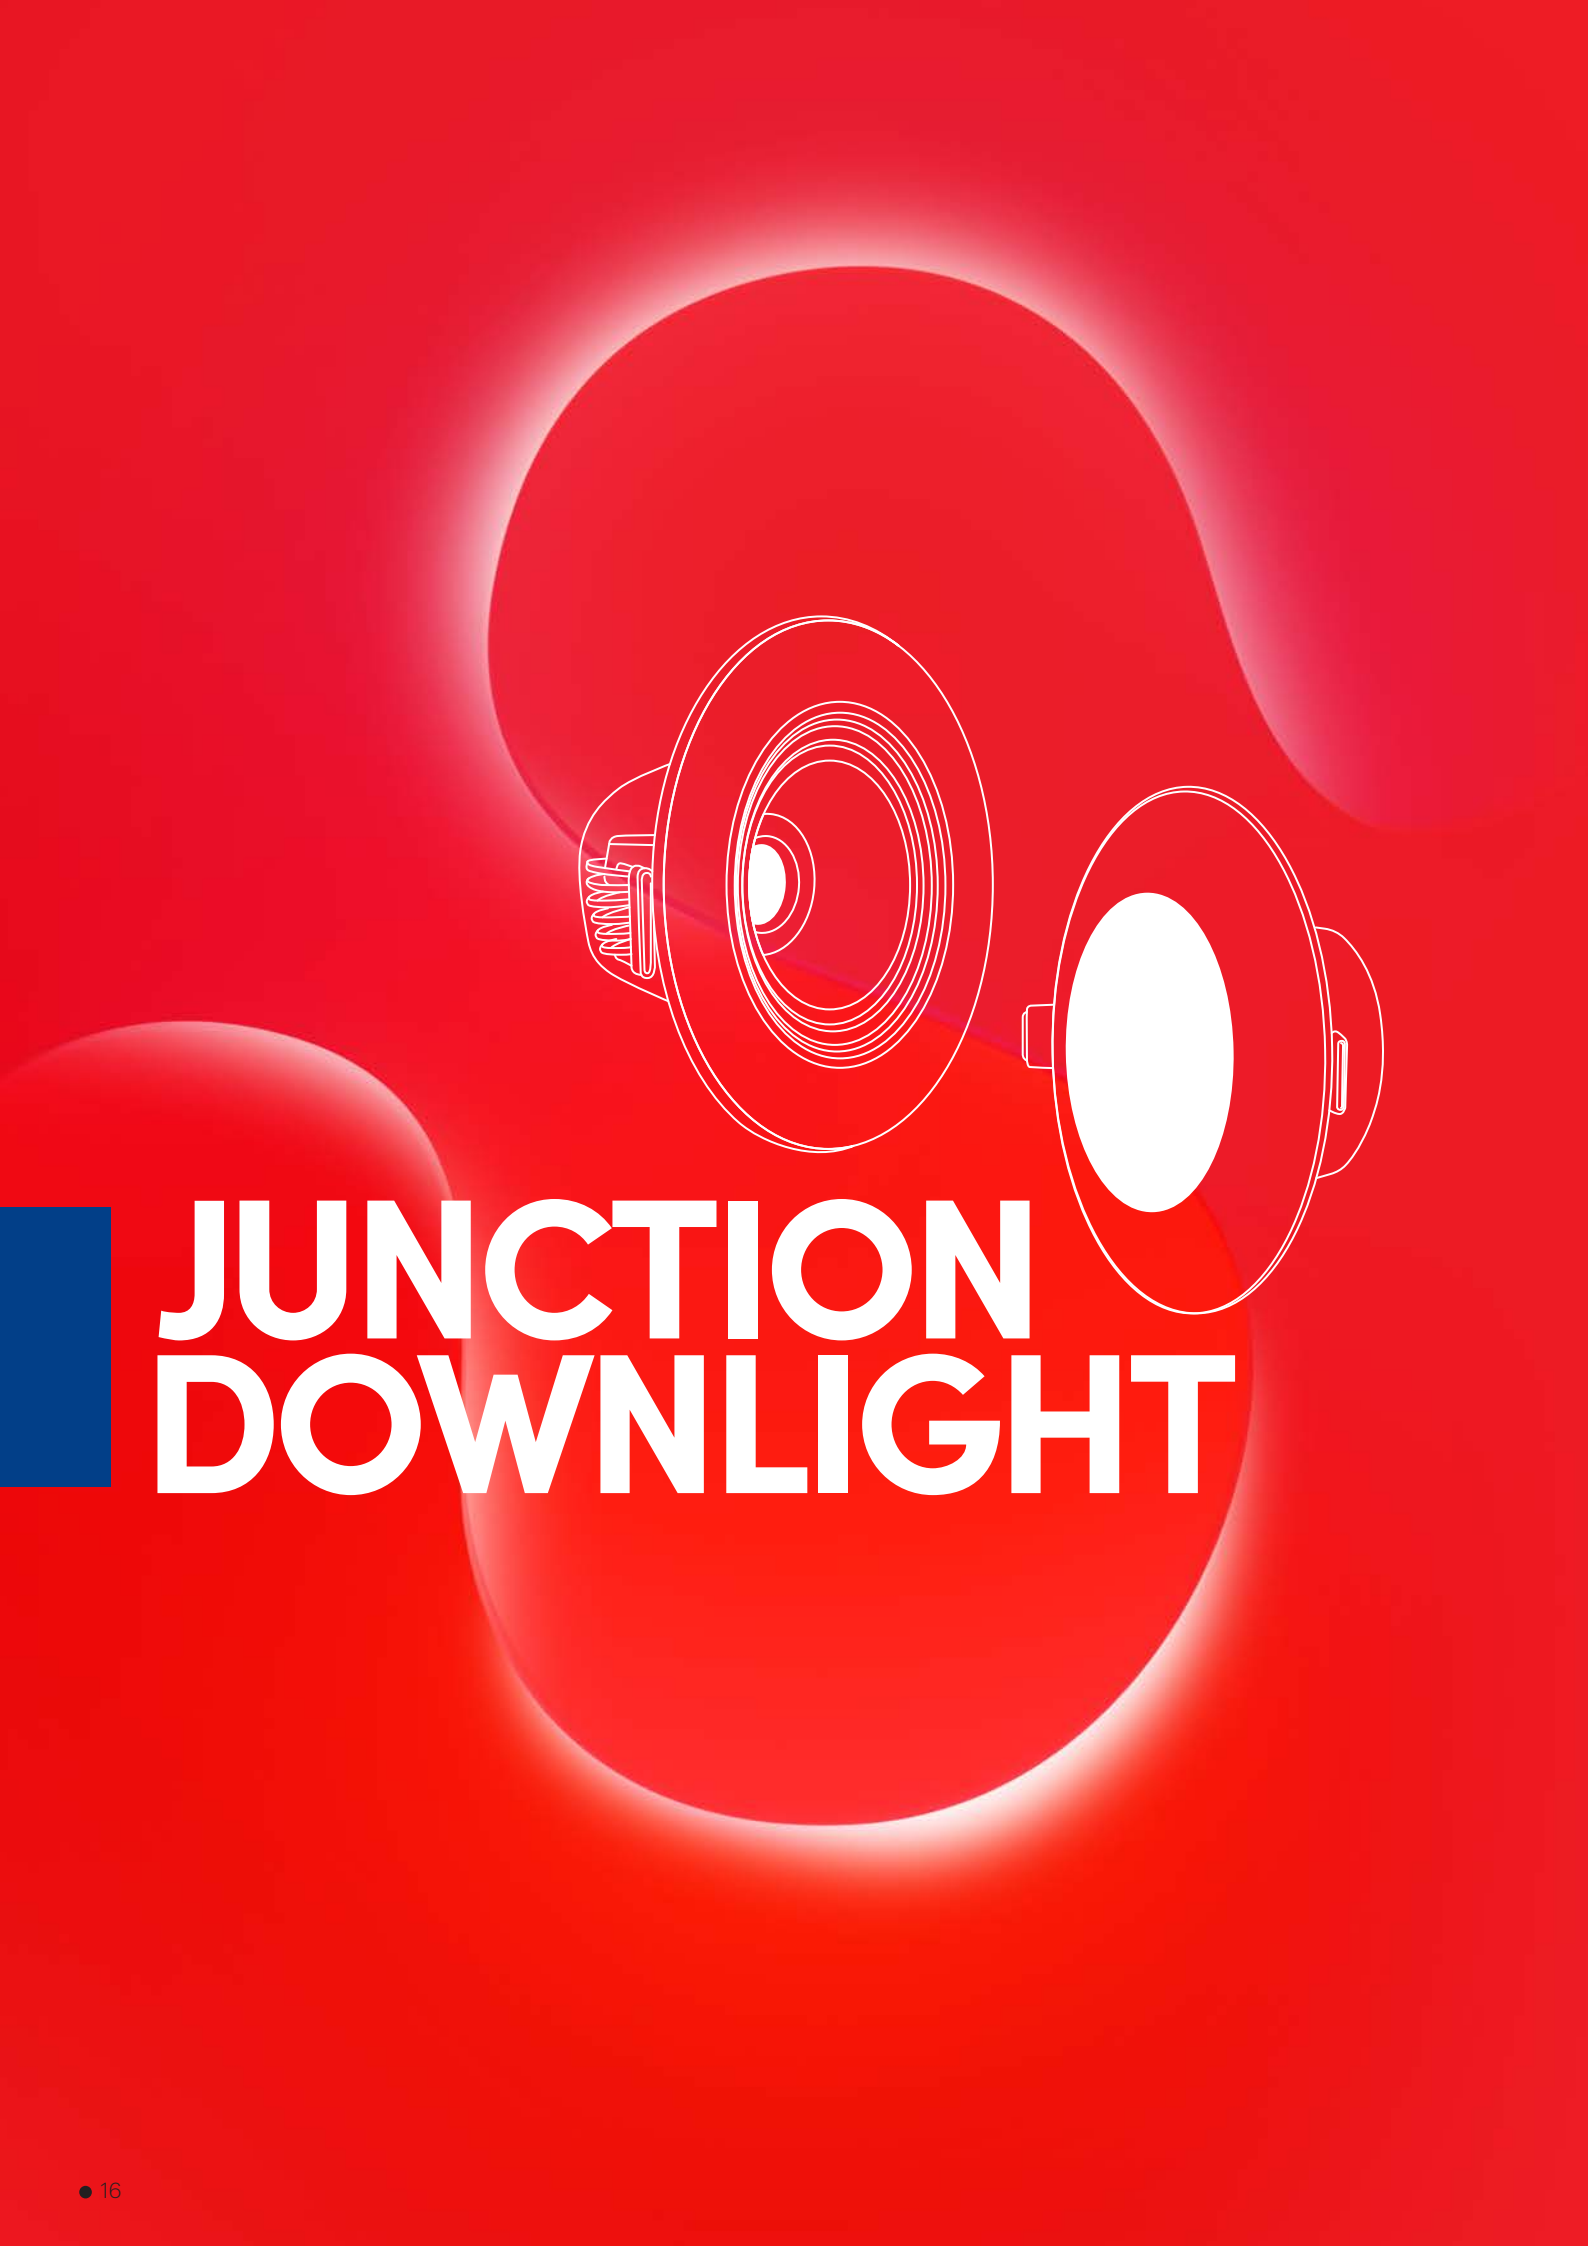

JUNCTION DOWNLIGHT

TWO COLOR DOWNLIGHT



Housing PC	CRI >80
Input Voltage AC 140-270V, 50Hz	Light Source SMD LED (2835)
Body Colour White	Driver DOB Types
Surge Protection Upto 2.5 kV	Diffuser PC Milky Antiglare

Applications

Home | School | Hotels | Malls | Hospitals

Product Code	Wattage No	Colour Temp (CRI)	Lumen (Lm)	Dimension (AxB) mm	Cut-Out (C) mm
TWO COLOR DOWNLIGHT RD					
108405	7+7W	3000K/4000K/6500K	490	ø84	ø50
108406	12+12W	3000K/4000K/6500K	490	ø84	ø50
MPD PANEL DOWNLIGHT					
108407	3W	3000K/4000K/6500K	195	ø80	ø55

LED RECESSED DOWNLIGHT



Housing PC	CRI >80
Input Voltage AC 140-270V, 50Hz	Light Source SMD LED (2835)
Body Colour White	Driver DOB Types
Surge Protection Upto 3 kV	Diffuser PS Milky Antiglare

 88% Energy Saving	 Non-Dimmable	 External Driver
 120° Beam Angle	 Easy Installation	 Eco Friendly
 Fluctuation Proof	 Robust Design	 IP 20

JUNCTION DOWNLIGHT

FAN BOX DOWNLIGHT



Housing PC	CRI >80
Input Voltage AC 140-270V, 50Hz	Light Source SMD LED (2835)
Body Colour White	Driver Integrated (Non-Isolated)
Surge Protection Upto 2.5 kV	Diffuser PC Milky Antiglare

Applications

Home | School | Hotels | Malls | Hospitals

Product Code	Wattage No	Colour Temp (CRI)	Lumen (Lm)	Dimension (AxB) mm	Cut-Out (C) mm
FAN BOX DOWNLIGHT					
108408	5W	3000K/4000K/6500K	350	ø95x27	70
108409	12W	3000K/4000K/6500K	840	ø130x27	100
108410	15W	3000K/4000K/6500K	1050	ø170x27	135
108411	20W	3000K/4000K/6500K	1400	ø190x27	150
RECESSED FASHION COB LIGHT					
108412	3W	3000K/4000K/6500K	270	ø70	45

RECESSED FASHION COB LIGHT



Housing PC	CRI >80
Input Voltage AC 140-270V, 50Hz	Light Source SMD LED Types
Body Colour White	Driver Integrated (Non-Isolated)
Surge Protection Upto 2.5 kV	Diffuser PC Milky Antiglare

 88% Energy Saving	 Non-Dimmable	 External Driver
 120° Beam Angle	 Easy Installation	 Eco Friendly
 Fluctuation Proof	 Robust Design	 IP 20

FASHION LED LIGHT



Housing PC	CRI >80
Input Voltage AC 140-270V, 50Hz	Light Source COB Types
Body Colour White	Driver Integrated (Non-Isolated)
Surge Protection Upto 2.5 kV	Diffuser PC Milky Antiglare

Applications

Home | School | Hotels | Malls | Hospitals

Product Code	Wattage No	Colour Temp (CRI)	Lumen (Lm)	Dimension (AxB) mm	Cut-Out (C) mm
FASHION LED LIGHT RD					
108413	3W	3000K/4000K/6500K	270	ø70	ø45
FM11					
108414	6W	3000K/4000K/6500K	420	ø105	ø75

FM11



Housing PP	CRI >80
Input Voltage AC 180-300V, 50Hz	Light Source SMD LED (2835)
Body Colour White	Driver DOB
Surge Protection Upto 4kV	Diffuser PC

 88% Energy Saving	 Non-Dimmable	 External Driver
 120° Beam Angle	 Easy Installation	 Eco Friendly
 Fluctuation Proof	 Robust Design	 IP 20

JUNCTION DOWNLIGHT

FM21



Housing PC	CRI >80
Input Voltage AC 100-300V, 50Hz	Light Source SMD LED (2835)
Body Colour White	Driver Integrated (Non Isolated)
Surge Protection Upto 4 kV	Diffuser PC

Applications

Home | School | Hotels | Malls | Hospitals

Product Code	Wattage No	Colour Temp (CRI)	Lumen (Lm)	Dimension (AxB) mm	Cut-Out (C) mm
FM21					
108415	W	3000K/4000K/6500K	490	ø109	ø75
TRANSPARENT JUNCTION BOX RD					
108416	7W	3000K/4000K/6500K	490	ø104	ø58

TRANSPARENT JUNCTION BOX



Housing PC	CRI >80
Input Voltage AC 100-300V, 50Hz	Light Source SMD LED (2835)
Body Colour White	Driver Integrated (Non Isolated)
Surge Protection Upto 2.5kV	Diffuser Acrylic

 88% Energy Saving	 Non-Dimmable	 External Driver
 120° Beam Angle	 Easy Installation	 Eco Friendly
 Fluctuation Proof	 Robust Design	 IP 20

TIEGO



Housing

PC

CRI

>80

Input Voltage

AC 180-300V, 50Hz

Light Source

SMD LED (2835)

Body Colour

White

Driver

DOB

Surge Protection

Upto 2kV

Diffuser

PC Milky Antiglare



Applications

Home | School | Hotels | Malls | Hospitals

Product Code	Wattage No	Colour Temp (CRI)	Lumen (Lm)	Dimension (AxB) mm	Cut-Out (C) mm
TIEGO					
108417	7W	3000K/4000K/6500K	490	ø109	ø73



88% Energy Saving



Non-Dimmable



External Driver



120° Beam Angle



Easy Installation



Eco Friendly



Fluctuation Proof





Robust Design



IP 20



SPOT LIGHT

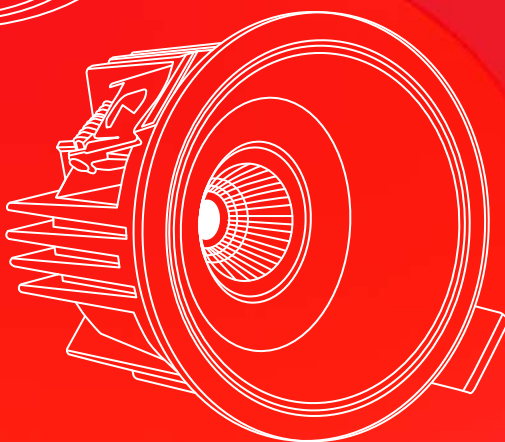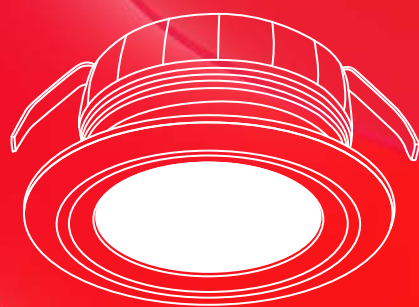

SPOT LIGHT



Housing PP	CRI >80
Input Voltage AC 140-270V, 50Hz	Light Source SMD LED (2835)
Body Colour White	Driver DOB Types
Surge Protection Upto 0.5 kV	Diffuser PS Antiglare

Applications

Home | School | Hotels | Malls | Hospitals

Product Code	Wattage No	Colour Temp (CRI)	Lumen (Lm)	Dimension (AxB) mm	Cut-Out (C) mm
LED SPOT LIGHT RD					
108418	1W	3000K/4000K/6500K	60	ø37	ø35
108419	2W	3000K/4000K/6500K	120	ø37	ø35
108420	3W	3000K/4000K/6500K	180	ø43	ø42
COB ANTI GLARE RD					
108421	7W	3000K/4000K/6500K	500	ø70x55	ø60
108422	12W	3000K/4000K/6500K	1000	ø85x65	ø75
108423	18W	3000K/4000K/6500K	1700	ø95x75	ø85

COB ANTI GLARE



Housing Aluminium Die-Cast	CRI >80
Input Voltage AC 175-260V, 50Hz	Light Source COB
Body Colour White/Black	Driver Non Integrated (Isolated)
Surge Protection Upto 2.5 kV	Beam Angle 36°

 88% Energy Saving	 Non-Dimmable	 External Driver
 120° Beam Angle	 Easy Installation	 Eco Friendly
 Fluctuation Proof	 Robust Design	 IP 20

SPOT LIGHT

COB WITH REFLECTOR



Housing Aluminium Die-Cast	CRI >80
Input Voltage AC 175-260V, 50Hz	Light Source COB
Body Colour White/Black	Driver Non Integrated (Isolated)
Surge Protection Upto 2.5 kV	Beam Angle 36°

Applications

Home | School | Hotels | Malls | Hospitals

Product Code	Wattage No	Colour Temp (CRI)	Lumen (Lm)	Dimension (AxB) mm	Cut-Out (C) mm
COB WITH REFLECTOR RD					
108424	7W	3000K/4000K/6500K	500	ø70x55	ø65
108425	12W	3000K/4000K/6500K	1000	ø85x65	ø80
108426	18W	3000K/4000K/6500K	1700	ø95x75	ø90
DELTA COB RD					
108427	7W	3000K/4000K/6500K	500	ø65x53	ø85
108428	12W	3000K/4000K/6500K	1000	ø80x75	ø75
108429	18W	3000K/4000K/6500K	1700	ø100x95	ø90

DELTA COB



Housing Aluminium Die-Cast	CRI >80
Input Voltage AC 175-260V, 50Hz	Light Source COB
Body Colour White/Black	Driver Non-Integrated (Isolated)
Surge Protection Upto 2.5 kV	Diffuser 25° 38° 45°

 88% Energy Saving	 Non-Dimmable	 External Driver
 120° Beam Angle	 Easy Installation	 Eco Friendly
 Fluctuation Proof	 Robust Design	 IP 20

DELTA COB PLASTIC REFLECTOR



Housing Aluminium Die-Cast	CRI >80
Input Voltage AC 175-260V, 50Hz	Light Source COB
Body Colour White/Black	Driver Non-Integrated (Isolated)
Surge Protection Upto 2.5 kV	Diffuser 25° 38° 45°

Applications

Home | School | Hotels | Malls | Hospitals

Product Code	Wattage No	Colour Temp (CRI)	Lumen (Lm)	Dimension (AxB) mm	Cut-Out (C) mm
DELTA COB PLASTIC REFLECTOR RD					
108430	7W	3000K/4000K/6500K	500	ø65x53	ø58
108431	12W	3000K/4000K/6500K	1000	ø80x75	ø75
108432	18W	3000K/4000K/6500K	1700	ø100x95	ø90
PIN HOLE SURFACE SPOT RD					
108433	6W	3000K/4000K/6500K	450	ø48x75	NA
108434	15W	3000K/4000K/6500K	1200	ø67x80	NA
108435	24W	3000K/4000K/6500K	2400	ø93x105	NA

PIN HOLE SURFACE SPOT



Housing Aluminium Die-Cast	CRI >80
Input Voltage AC 175-260V, 50Hz	Light Source SMD
Body Colour White/Black	Driver Non Integrated (Isolated)
Surge Protection Upto 2.5 kV	Beam Angle 36°

 88% Energy Saving	 Non-Dimmable	 External Driver
 120° Beam Angle	 Easy Installation	 Eco Friendly
 Fluctuation Proof	 Robust Design	 IP 20

SPOT LIGHT

SURFACE SPOT COB



Housing Aluminium Die-Cast	CRI >80
Input Voltage AC 175-260V, 50Hz	Light Source COB
Body Colour White/Black	Driver Non Integrated (Isolated)
Surge Protection Upto 2.5 kV	Beam Angle 30°

Applications

Home | School | Hotels | Malls | Hospitals

Product Code	Wattage No	Colour Temp (CRI)	Lumen (Lm)	Dimension (AxB) mm	Cut-Out (C) mm
SURFACE SPOT COB RD					
108436	5W	3000K/4000K/6500K	400	ø55x75	NA
108437	12W	3000K/4000K/6500K	1000	ø73x95	NA
108438	18W	3000K/4000K/6500K	1600	ø95x110	NA
ALUMINIUM SWIVEL COB RD					
108439	3W	3000K/4000K/6500K	270	ø63x43	ø55
108440	6W	3000K/4000K/6500K	540	ø87x56	ø70
108441	12W	3000K/4000K/6500K	1080	ø100x71	ø85
108442	15W	3000K/4000K/6500K	1350	ø100x71	ø85
108443	18W	3000K/4000K/6500K	1440	ø115x72	ø95
108444	24W	3000K/4000K/6500K	1920	ø135x85	ø125

ALUMINIUM SWIVEL COB



Housing AL	CRI >80
Input Voltage AC 140-260V, 50Hz	Light Source SMD LED (2835)
Body Colour White	Driver Non-Integrated (Isolated)
Surge Protection Upto 3.5 kV	Diffuser PC Antiglare

 88% Energy Saving	 Non-Dimmable	 External Driver
 120° Beam Angle	 Easy Installation	 Eco Friendly
 Fluctuation Proof	 Robust Design	 IP 20

PLASTIC SWIVEL PANEL DOWNLIGHT



Housing PC	CRI >80
Input Voltage AC 140-270V, 50Hz	Light Source SMD LED (2835)
Body Colour White	Driver Integrated (Non Isolated)
Surge Protection Upto 3/4 kV	Diffuser PS Antiglare



Applications

Home | School | Hotels | Malls | Hospitals

Product Code	Wattage No	Colour Temp (CRI)	Lumen (Lm)	Dimension (AxB) mm	Cut-Out (C) mm
PLASTIC SWIVEL PANEL DOWNLIGHT RD					
108445	3W	3000K/4000K/6500K	195	ø74	ø57
108446	6W	3000K/4000K/6500K	420	ø95	ø70
108447	9W	3000K/4000K/6500K	630	ø116	ø90
108448	12W	3000K/4000K/6500K	900	ø140	ø115

		
88% Energy Saving	Non-Dimmable	External Driver
		
120° Beam Angle	Easy Installation	Eco Friendly
		
Fluctuation Proof	Robust Design	IP 20



EMERGENCY BULB

EMERGENCY BULB



Housing

PC

CRI

>80

Input Voltage

AC 180-300V, 50Hz

Light Source

SMD LED (2835)

Body Colour

White

Driver

DOB

Surge Protection

Upto 4 kV

Diffuser

PC



Applications

Home | School | Hotels | Malls | Hospitals

Product Code	Wattage No	Colour Temp (CRI)	Lumen (Lm)	Dimension (AxB) mm	Cut-Out (C) mm
EMERGENCY BULB					
108449	9W	3000K/4000K/6500K	900	ø70x76	NA



88% Energy Saving



Non-Dimmable



External Driver



120° Beam Angle



Easy Installation



Eco Friendly



Fluctuation Proof





Robust Design




IP 20



OUTDOOR LIGHT

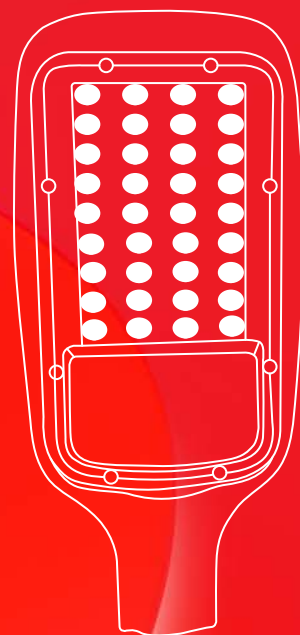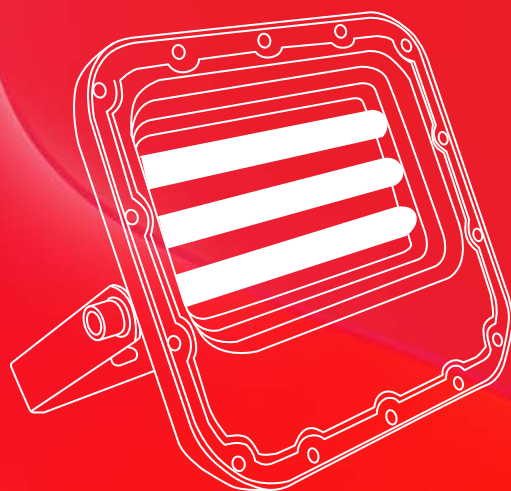

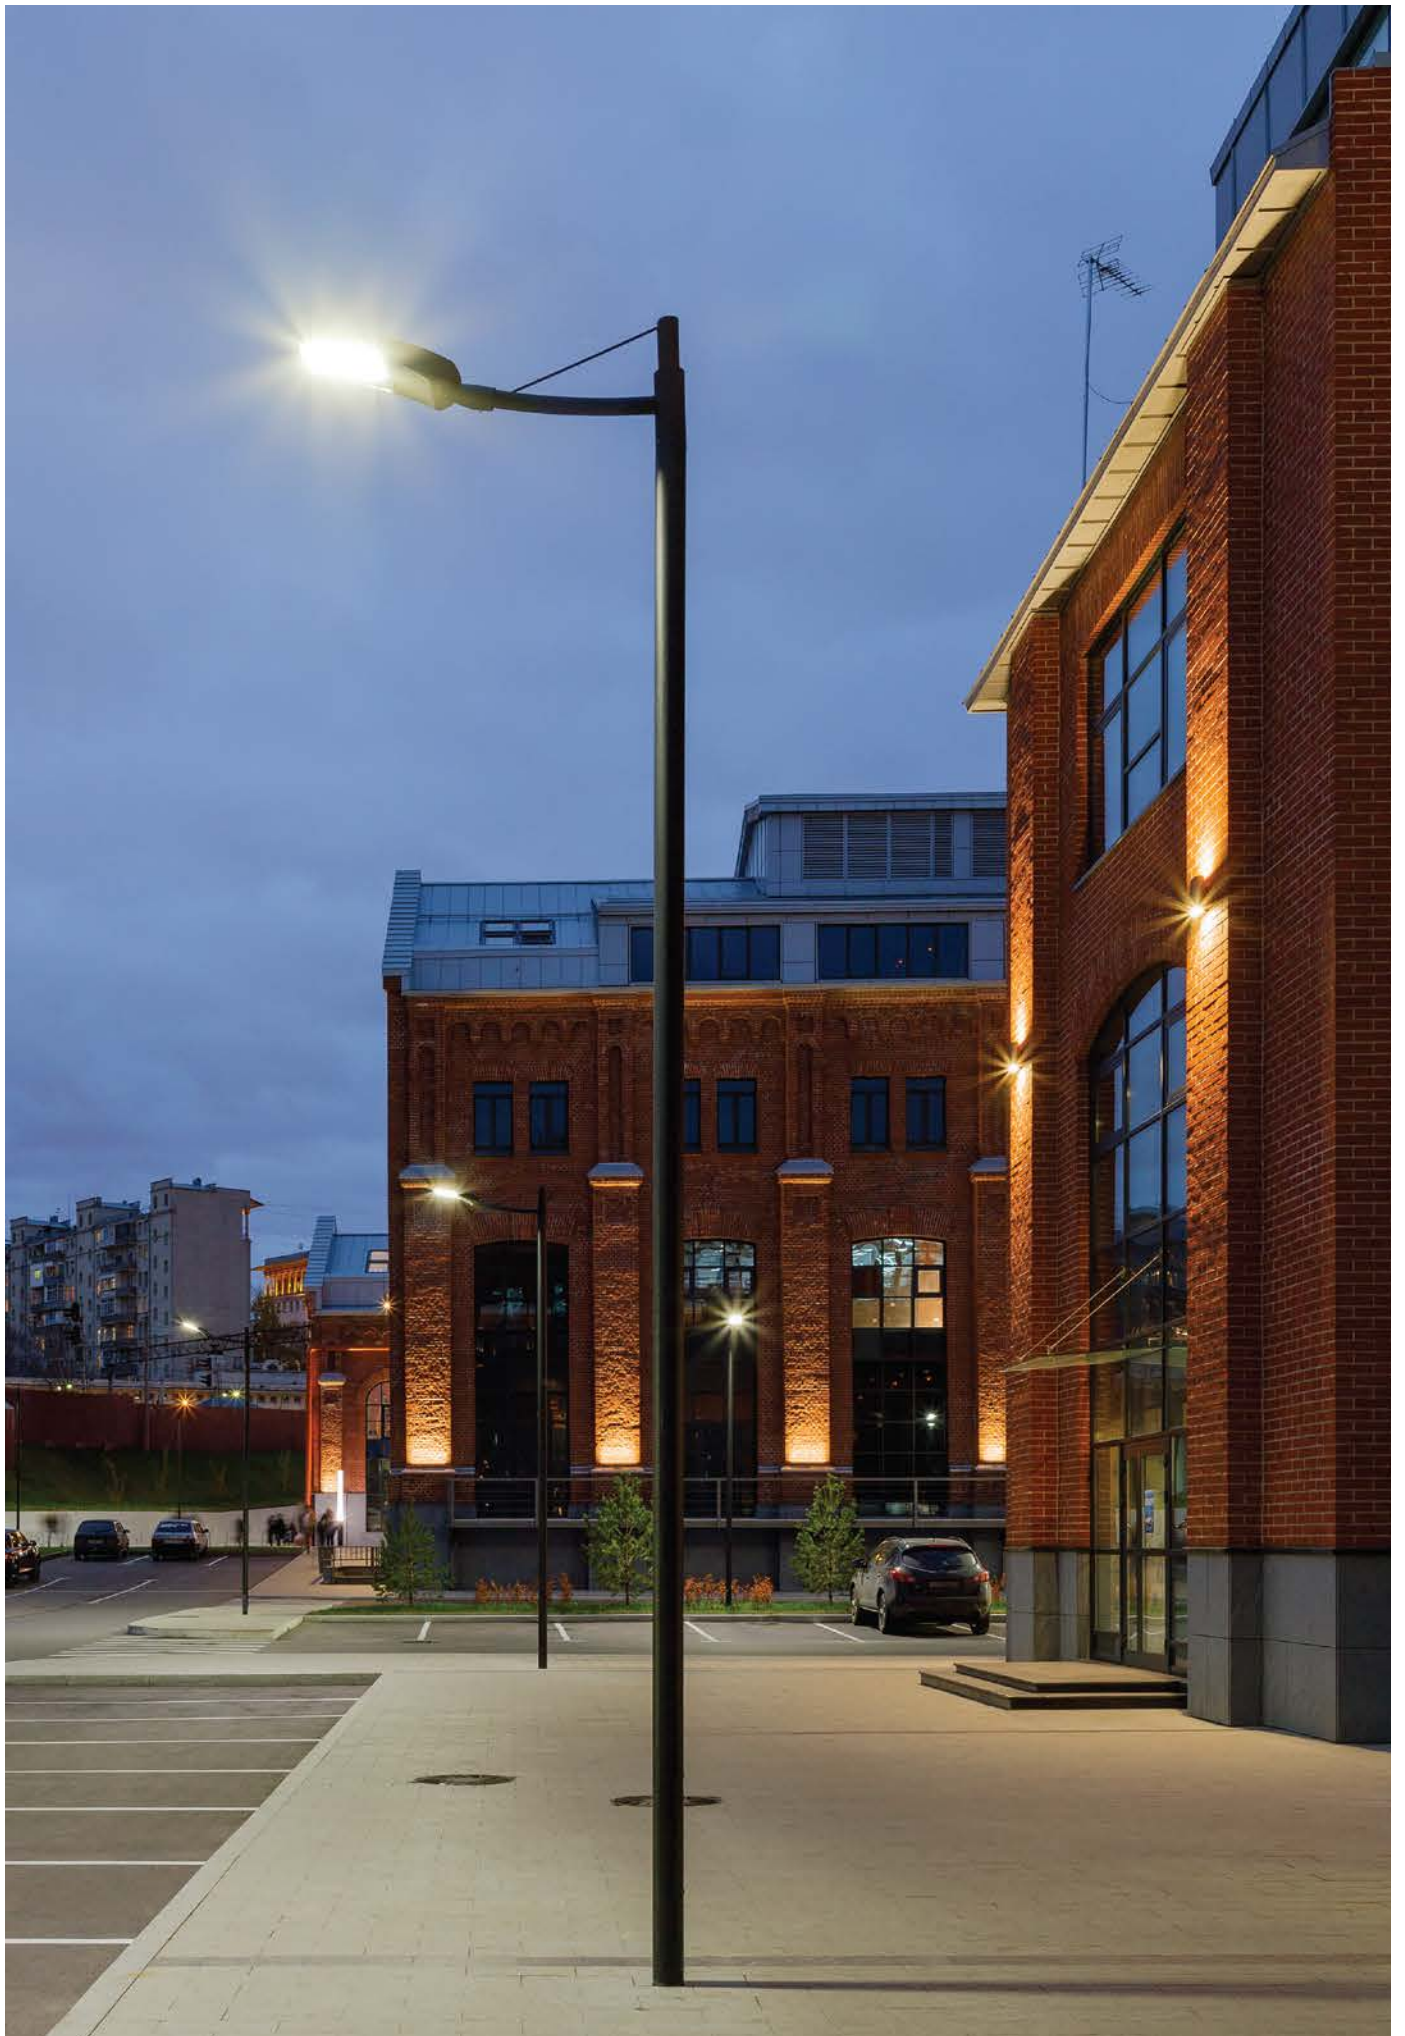

OUTDOOR LIGHT

WALL WASHER LIGHT OUTDOOR



Housing Al	CRI >80
Input Voltage AC 100-300V, 50Hz	Light Source SMD LED (2835)
Body Colour Black	Driver Integrated (Non Isolated)
Surge Protection Upto 4 kV	Diffuser PC

Applications

Home | School | Hotels | Malls | Hospitals

Product Code	Wattage No	Colour Temp (CRI)	Lumen (Lm)	Dimension (AxB) mm	Cut-Out (C) mm
WALL WASHER LIGHT OUTDOOR					
108450	6W	3000K/4000K/6500K	600	ø80x6.5	NA
108451	12W	3000K/4000K/6500K	1200	ø98x80.5	NA
108452	18W	3000K/4000K/6500K	1800	ø152.5x80	NA
HIGH WATTAGE BULB					
108453	23W	3000K/4000K/6500K	2300	ø79.5x66	NA
108454	30W	3000K/4000K/6500K	3000	ø99.5x85	NA
108455	40W	3000K/4000K/6500K	4000	ø117x95	NA
108456	50W	3000K/4000K/6500K	5000	ø137x109.5	NA

HIGH WATTAGE BULB



Housing PC	CRI >80
Input Voltage AC 100-300V, 50Hz	Light Source SMD LED (2835)
Body Colour White	Driver Non-Integrated (Isolated)
Surge Protection Upto 4 kV	Diffuser PC

 88% Energy Saving	 Non-Dimmable	 External Driver
 120° Beam Angle	 Easy Installation	 Eco Friendly
 Fluctuation Proof	 Robust Design	 IP 20

LED FLOOD LIGHT OUTDOOR



Housing AL	CRI >80
Input Voltage AC 140-270V, 50Hz	Light Source SMD LED (2835)
Body Colour White	Driver Integrated (Non Isolated)
Surge Protection Upto 4 kV	Diffuser PC Milky Antiglare

Applications

Home | School | Hotels | Malls | Hospitals

Product Code	Wattage No	Colour Temp (CRI)	Lumen (Lm)	Dimension (AxB) mm	Cut-Out (C) mm
LED FLOOD LIGHT OUTDOOR					
108457	30W	3000K/4000K/6500K	3000	150x170x31	NA
108458	50W	3000K/4000K/6500K	5000	200x180x31	NA
108459	100W	3000K/4000K/6500K	10000	250x230x31	NA
108460	150W	3000K/4000K/6500K	15000	280x260x31	NA
108461	200W	3000K/4000K/6500K	20000	300x280x31	NA
ALUMINIUM STREET LIGHT					
108462	24W	3000K/4000K/6500K	2400	ø257x114	NA
108463	36W	3000K/4000K/6500K	3600	ø300x139	NA
108464	50W	3000K/4000K/6500K	5000	ø344x154	NA

ALUMINIUM STREET LIGHT



Housing Aluminium	CRI >80
Input Voltage AC 100-300V, 50Hz	Light Source SMD LED (2835)
Body Colour Grey	Driver Integrated (Isolated)
Surge Protection Upto 4 kV	Diffuser PC

 88% Energy Saving	 Non-Dimmable	 External Driver
 120° Beam Angle	 Easy Installation	 Eco Friendly
 Fluctuation Proof	 Robust Design	 IP 20

OUTDOOR LIGHT

PLASTIC STREET LIGHT OUTDOOR



Housing PC	CRI >80
Input Voltage AC 100-300V, 50Hz	Light Source SMD LED (2835)
Body Colour Grey	Driver Integrated (Isolated)
Surge Protection Upto 4 kV	Diffuser PC

Applications

Home | School | Hotels | Malls | Hospitals

Product Code	Wattage No	Colour Temp (CRI)	Lumen (Lm)	Dimension (AxB) mm	Cut-Out (C) mm
PLASTIC STREET LIGHT					
108465	20W	3000K/4000K/6500K	2000	293x91.5	NA
108466	30W	3000K/4000K/6500K	3000	332x105	NA
108467	50W	3000K/4000K/6500K	5000	394x128.5	NA



88% Energy Saving



Non-Dimmable



External Driver



120° Beam Angle



Easy Installation



Eco Friendly



Fluctuation Proof



Robust Design



IP 20



NOTES

[illegible]

NOTES

[illegible]

Manufactured & Marketed by :



UniWide
Industries Pvt. Ltd.

Energising a Sustainable Tomorrow!



18, Shivneri, Babai Naka, L. T. Road,
Borivali (West), Mumbai - 400092.



+91 84339 94006



contactus@uniwideindustries.com



www.uniwideindustries.com